

Fuji Electric Redesigned Lockout/Tagout (LOTO) Devices

Features & Benefits

Larger padlock hole size to accommodate padlocks commercially available in the US market


Overall dimensions changed to match panel cutout width

Field-installable

Conforms to requirements outlined in UL489, NFPA79 2018 Ed: 5.3.3.1, SEMI S2-0818Eb: 17, SEMI S22-0718E: 8.14, and OSHA: 1910.147



Part Number	Applicable Breaker Types
BW9Q2BB-0B795	BW50RBGU-3P, EW50RBGU-3P
BW9Q2AB-0B795	BW50RAGU-3P, EW50RAGU-3P BW100EAGU-3P, EW100EAGU-2P, EW100RAGU-3P
BW9Q2CB-0B795	BW125RAGU-2P, BW125RAGU-3P, EW125RAGU-3P BW125JAGU-3P, EW125JAGU-3P
BW9Q2GB-0B795	BW250EAGU-2P, BW250EAGU-3P BW250JAGU-2P, BW250JAGU-3P, EW250JAGU-3P BW250RAGU-2P, BW250RAGU-3P, EW250RAGU-3P

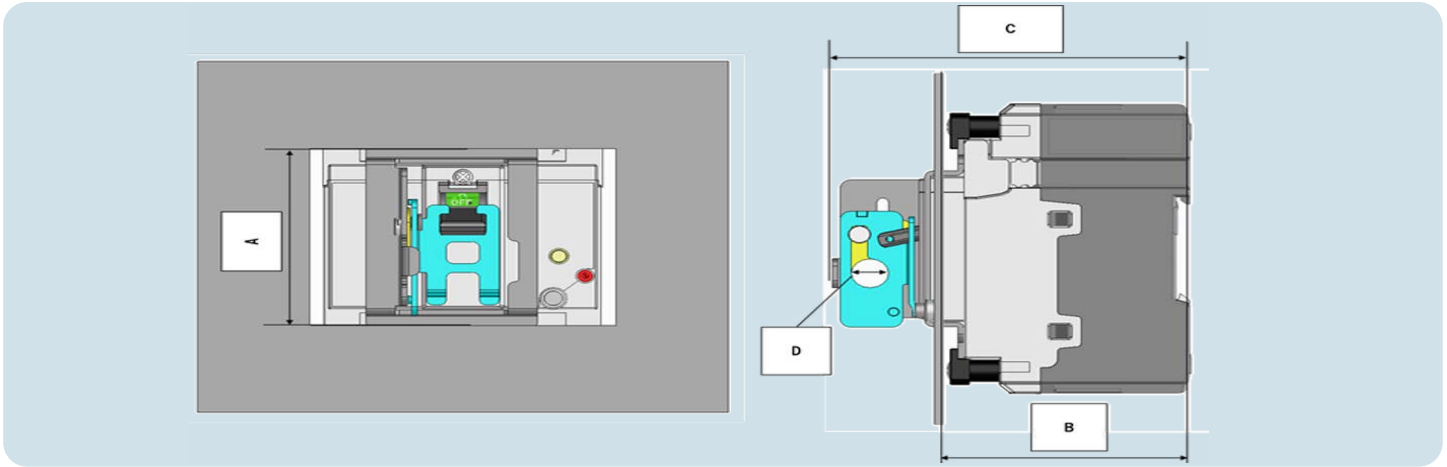

	Panel Cutout Width (A)	Panel Cutout Depth (B)	Breaker bottom to LOTO's top distance (C)	Padlock Hole Size (D)	Applicable padlock/hasp diameter
BW9Q2BB-0B795	2.4in (61mm)	2.91in (74mm)	4.09in (104mm)	ø 0.39in (10mm)	ø 5/32in to 5/16in (ø 3.97mm to 7.94mm)
BW9Q2AB-0B795	2.4in (61mm)	2.6in (66mm)	3.78in (96mm)		
BW9Q2CB-0B795	2.76in (70mm)	2.91in (74mm)	4.13in (105mm)		
BW9Q2GB-0B795	2.76in (70mm)	2.91in (74mm)	4.13in (105mm)		

Recommended Padlock/Hasp Part Numbers

Masterlock
120D, 130D



Masterlock
M1XT



Masterlock
Hasp 420



Masterlock
Hasp 421



Fuji Electric Corp. of America

47520 Westinghouse Drive
Fremont, CA 94539

Phone: (510) 403-7860

Tech Support: (510) 403-7865